


Driver LC 38W 350-500mA 85V flexC Ip SNC4

Kod ElektriKo: 107594 Kod Tridonic: 87501116



UWAGA: Zdjęcie poglądowe dla całej rodziny produktów.

- _ LED Stały prądowy sterownik LED do montażu opraw
- _ Do opraw klasy I
- _ Ochrona termiczna zgodnie z normą EN 61347-2-13 C5e
- _ Wybieralny stały prąd wyjściowy 350, 400, 450 i 500 mA (prąd wstępnie wybrany 500 mA)
- _ Maksymalna moc wyjściowa 38,3 W
- _ Sprawność do 90%
- _ Znamionowa żywotność do 100 000 godz.

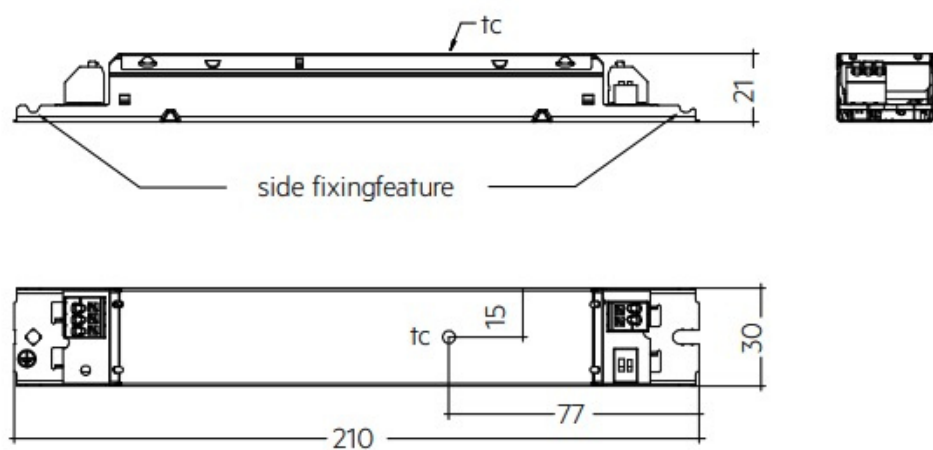

UWAGA: Zdjęcie poglądowe dla całej rodziny produktów.

Ordering data

Type	Article number	Packaging, carton	Packaging, low volume	Packaging, high volume	Weight per pc.
LC 38/350-500/85 flexC Ip SNC4	87501116	50 pc(s).	1,100 pc(s).	3,300 pc(s).	0.125 kg

Technical data

Rated supply voltage	220 – 240 V
AC voltage range	198 – 264 V
DC voltage range	176 – 280 V
Max. input current (at 230 V, 50 Hz, full load) ^①	190 mA
Typ. current (220 V, 0 Hz, full load, EOFx dimlevel)	220 mA
Leakage current (at 230 V, 50 Hz, full load)	< 450 µA
Mains frequency	0 / 50 / 60 Hz
Overvoltage protection	320 V AC, 48 h
Output power range	12.3 – 38.3 W
Typ. efficiency (at 230 V, 50 Hz, full load) ^①	90 %
λ (at 230 V, 50 Hz, full load) ^①	0.95
Output current tolerance ^②	± 7.5 %
Max. output voltage (U-OUT)	300 V
THD (at 230 V, 50 Hz, full load) ^③	< 15 %
Max. peak output current at full load ^①	564 mA
Output LF current ripple (< 120 Hz)	± 5 %
Output P_ST_LM (at full load)	≤ 1
Output SVM (at full load)	≤ 0.4
Starting time (at 230 V, 50 Hz, full load)	≤ 0.5 s
Starting time (DC mode)	≤ 0.5 s
Switchover time (AC/DC)	≤ 0.5 s
Turn off time (at 230 V, 50 Hz, full load)	≤ 0.5 s
Hold on time at power failure (output)	0 s
Ambient temperature ta (at lifetime 50,000 h)	60 °C
Storage temperature ts	-40 ... +80 °C
Mains burst capability	1 kV
Mains surge capability (between L - N)	1 kV
Mains surge capability (between L/N - PE)	2 kV
Surge voltage at output side (against PE)	3.5 kV
Lifetime	up to 100,000 h
Guarantee (conditions at www.tridonic.com)	5 Year(s)
Dimensions L x W x H	210 x 30 x 21 mm
Hole spacing D	198 mm

UWAGA: Zdjęcie poglądowe dla całej rodziny produktów.