
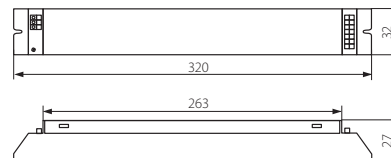
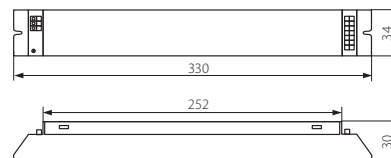



**BL-EVG**

- ▶ obudowa: blacha stalowa
- ▶ casing: steel sheet


 BL-118H-EVG  
 BL-218H-EVG  
 BL-136H-EVG

 BL-236H-EVG  
 BL-258H-EVG  
 BL-158H-EVG

 BL-418H-EVG  
 BL-3-4x14H-EVG

Kanlux	Kanlux		In	[W]	[g]
BL-118H-EVG	70480	srebrny / silver	0,08A	1 x 18	210
BL-218H-EVG	70483	srebrny / silver	0,16A	2 x 18	230
BL-136H-EVG	70481	srebrny / silver	0,16A	1 x 36	210
BL-236H-EVG	70484	srebrny / silver	0,32A	2 x 36	285
BL-158H-EVG	70482	srebrny / silver	0,26A	1 x 58	280
BL-258H-EVG	70485	srebrny / silver	0,51A	2 x 58	310
BL-418H-EVG	70486	srebrny / silver	0,98A	4 x 18	290
BL-3-4x14H-EVG	08240	srebrny / silver	0,19A / 0,24A	3 x 14 / 4 x 14	280

--	--	--	--	--	--	--	--	--	--	--	--	--	--

model BL-3-4x14H-EVG służy do stabilizacji prądu świetlówek T5, pozostałe modele służą do stabilizacji prądu świetlówek T8  
 BL-3-4x14H-EVG model is used for current stabilizing in T5 fluorescent tubes, other models are used for current stabilizing in T8 fluorescent tubes